

RE - EX Series PA Expander



Product Overview

RE-EX Series Expander operates with e'Scape. The consoles are expandable up to 128 zones with multiplication of 16 zones. These consoles are user-friendly systems with options for zone selection for individual zone announcement and common announcement through microphones.


Features

- * 24VDC Input voltage
- * 19" 2U Rack mountable.
- * Power ON, Communication, Fault Indications.
- * RS-485 Communication with Indication.
- * Membrane Keypad for user friendly operation.
- * Zone Wise /Zone Group (Speaker line) Selection facility with LED indication.
- * 100V audio output for Speaker.
- * Plug Type Connector for easy wiring.
- * Alarm activated on automatically announcing mode.
- * Zones expansion in Multiple of 16.

Specification

Input Voltage	: 24VDC
Operating Temperature	: 0 - 49° C/32-120° F.
Relative Humidity	: 93 ± 2% RH (non-condensing) at 32 ±2° C/90 ±3° F.
audio output	: 100V
Maximum Switching Wattage	: 500W
Maximum Zone Output	: 30W Per Zone
Audio Input	: From Main Console
Communication Interface	: RS-485
Dimensions(2U)	: (484 W X 88 H X 325D)mm

Connection Diagram

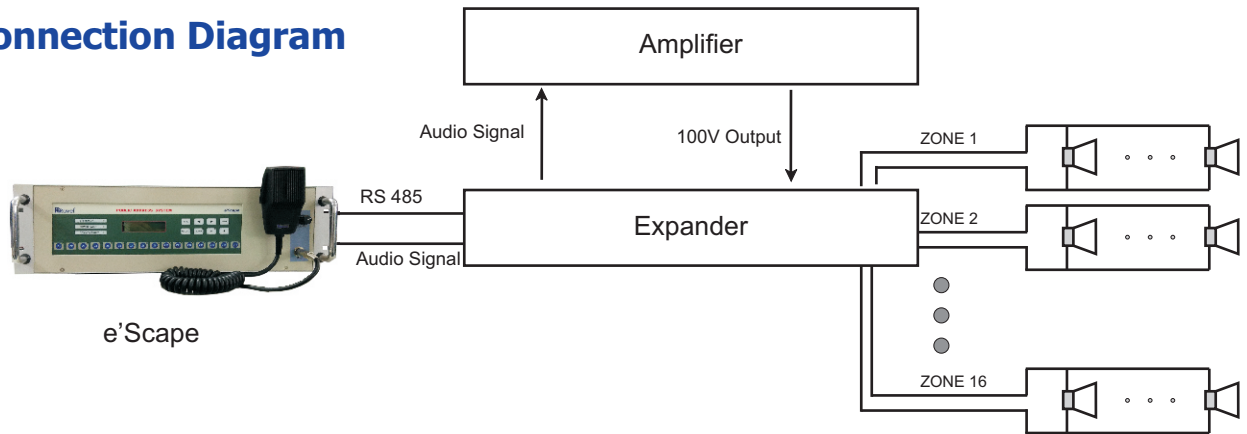

Ordering Information

Models	Description
RE-032EX	17-32 Zone PA Expander
RE-048EX	33-48 Zone PA Expander
RE-064EX	49-64 Zone PA Expander
RE-080EX	65-80 Zone PA Expander
RE-096EX	81-96 Zone PA Expander
RE-112EX	97-112 Zone PA Expander
RE-128EX	113-128 Zone PA Expander

Compatible Devices:

MODEL	DESCRIPTION
e'Scape	Public Address System
RE-LS10W	PA Wall Speaker
RE-LS10C	PA Ceiling Speaker

India:

RAVEL ELECTRONICS PVT LTD.,
 (An ISO 9001 Certified Company)
 150A, Electronics Industrial Estate, Perungudi, Chennai - 96 .India.
 E-Mail: marketing@ravelfire.com; Web : www.ravelfire.com

United Kingdom:

RAVEL ELECTRONICS LTD.,
 Unit 11, Chancel Industrial Estate, Newhall street,
 Willenhall WV13 1NX, West Midlands, United Kingdom.
 E-mail: info@ravelfire.co.uk; Web: www.ravelfire.co.uk