

# RE-317D-HL

#### ADDRESSABLE HEAT DETECTOR

#### General

Addressable heat detector(s) are designed to work with Addressable Fire Alarm Control Panel. These detectors are low profile, polarity free and have dual LED's for 360° visual indication. The LED's are blinking in normal operating condition whereas the LED's in steady state indicate alarm status.

Addressable heat detector is a fixed cum rate of rise heat detector using a thermistor. These detectors will raise an alarm when the detector reaches  $59^{\circ}$ C (Fixed) or when the change in temperature exceeds the rate of rise of  $11^{\circ}$ C / min.

#### **Features**

- UL listed and NFPA standard.
- Polarity free, Dual LED's, and 360° visibility.
- Fixed Temperature & rate of rise detection
- Advanced detection and communication protocol.
- Easy to install.
- Sleek low-profile housing design.
- Regular 100mm base.
- Address set by 8 digit DIP switch.






#### **Specification**

	Electrical Specification	
Operating Voltage	17 ~ 28V DC.	
Reset Voltage	Less than 3V.	
Standby Current	500 μΑ.	
Start up Time	30sec.	
Alarm Current	5 mA .	
Remote Output	2mA maximum open collector.	
Detector Spacing	9 meters.	
Fixed Temperature	59° C (138° F).	
Rate of Rise of Temperature	$11.1^{\circ}$ C / min ( $20^{\circ}$ F/min).	
Operating Temperature	-10° C to 37.8° C	
Storage Temperature	-10° C to 60° C.	
Humidity	0 - 95% RH, non-condensing.	
Mechanical Specification		
Dimension	46 H x 100 D ( mm)	
Weight	150 g with base	
IP Rating	IP-42	

RE-317D-HL / Rev 02-EN / 2020-2021

# **Wiring Diagram**

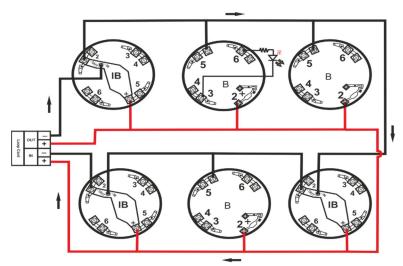

#### Note:

RI-Response Indicator

B – Standard Base

IB – Isolator Base

# **Compatible Device**

Model	Description
RE-314B	Normal Base
RE-314BI	Isolator Base

# **Compatible Panel**

Model	Description
Avani	Analogue addressable Fire Alarm Control panel expandable upto 4 loop
Avani XL	Analogue Addressable Fire Alarm Control Panel expandable upto 8 Loop

# **Ordering Information**

Model	Description
RE-317D-HL	Addressable Heat Detector